


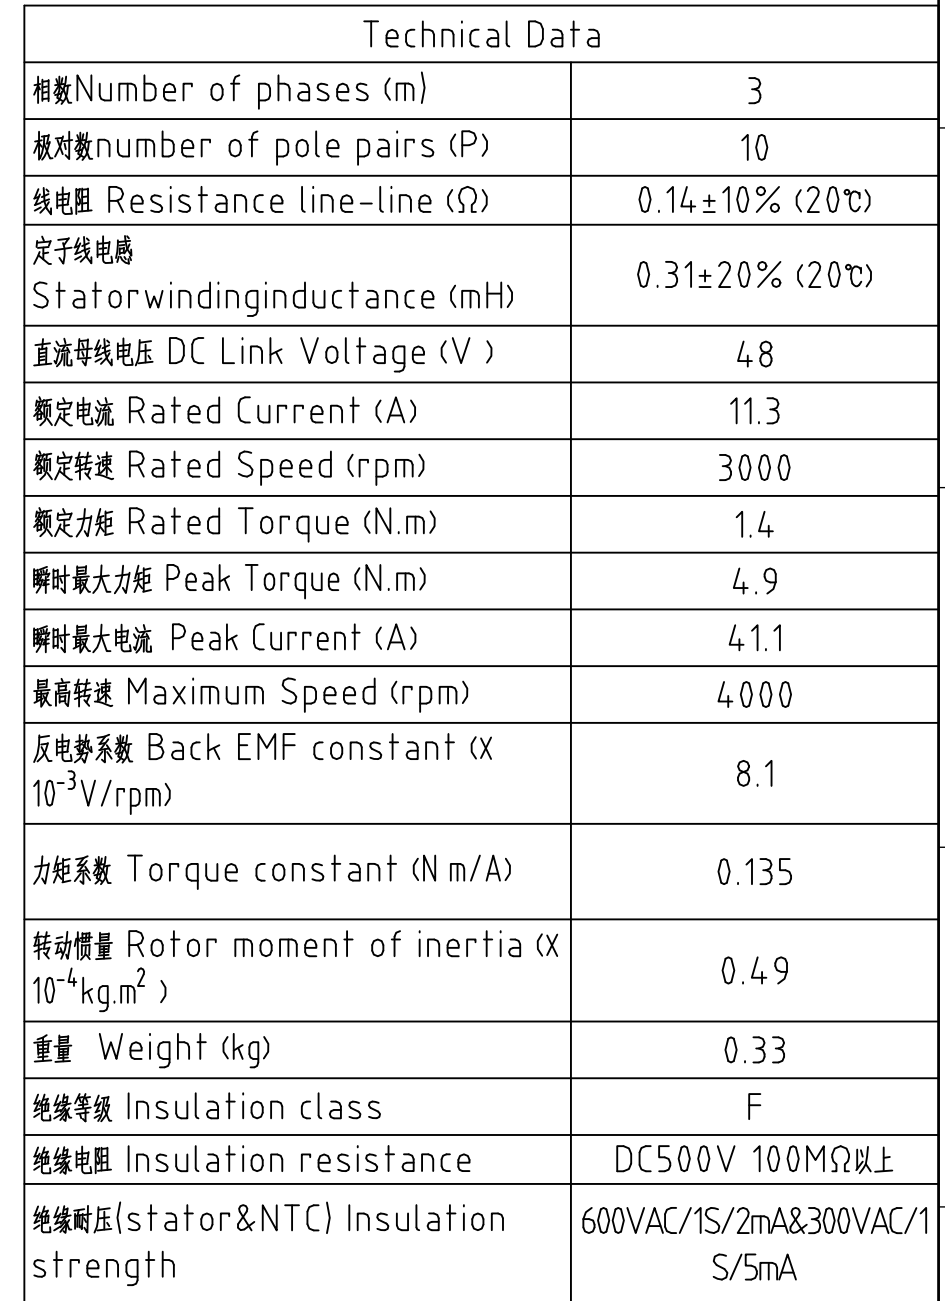

1. The weld seam on the outer cylindrical surface of the stator is free of cracks, the surface is free of protrusions, the glue filling is free of copper leakage, and there are no obvious air holes that affect use;
2. The solder joints of the outgoing lines are glued and fixed, and the solder joints of the enameled wires are coated with UV glue. The solder joints are free of impurities such as rosin slag;

设计 Designed	翟向千	2026/03/05	标准化 Standardized			材料(Material):	名称(Title)		无框电机70系列规格书	
制图 Drawn	翟向千	2026/03/05					型号(Model)		见一览表	
校对 Proofread			审核 Checked			重量(Weight)/g:	图号(DWG No.)			
工艺 Processed			批准 Approved			阶段标记(Stage Mark)		料号(Part No.)		
表单编号 Form No.				版本/版次 Edition/Serial NO.	A00				比例(Scale)	雷赛机器人
						共1页第1页 Page 1 of 1		FREE		